


INTRODUCING THE **HYTOWER MS-44**

HyTower's aerial platforms are made of high-strength steel for maximum boom rigidity and safety. Designed with Operator safety and affordability in mind, these units are an excellent choice for your aerial lift needs.



MS-44

The HyTower MS-44 offers a 44 ft working height and a 21 ft outreach. An interlock between the boom and the outriggers prevents boom movement if the outriggers are not completely stable, providing safety for you and your crew.

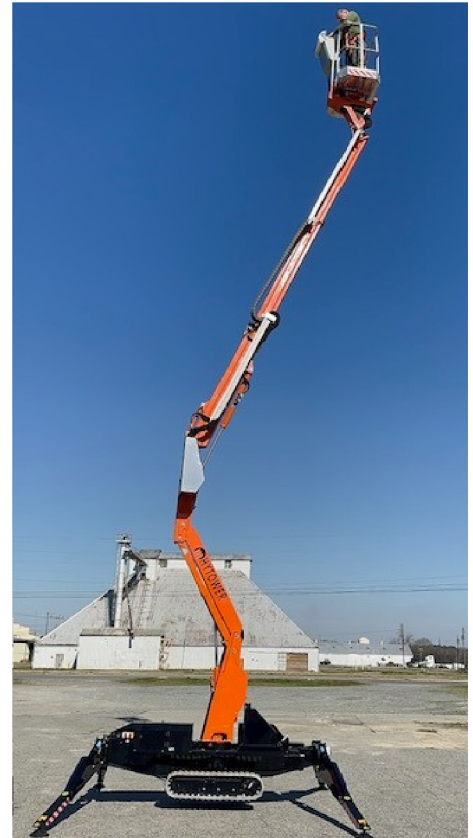

CONTACT US

Amanda Sexton
O: 478-595-0521
C: 276-206-9004
E: amandas@tristaraerial.com

01

Maximum lifting height : 44 ft.
Maximum lateral outreach: 21 ft.

02

100% Hydraulic Control System for platform operation allows for gradual and accurate movements.

Financing is available, subject to credit approval



678.302.0382





sales@tristaraerial.com




www.tristaraerial.com


SPECIFICATIONS

Working Height: 44 ft.
Lateral outreach: 21 ft.
Basket Capacity (Max): 440 lbs.
Turret Rotation: 360°
Dual Speed
Gasoline Engine
Proportional Hydraulic Controls
Wireless Remote Control
230V Power Socket in Basket
Supplementary 230V Electric Engine
Non-Marking Tracks

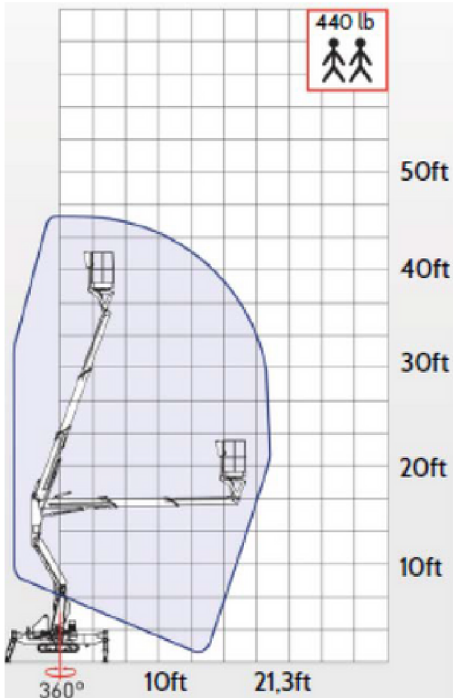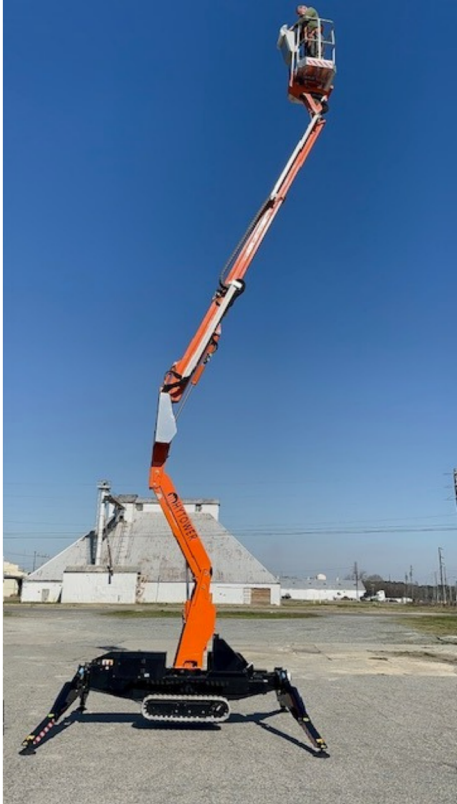

Financing is available, subject to credit approval


[678.302.0382](tel:678.302.0382)


sales@tristaraerial.com


www.tristaraerial.com